

DIMENSIONS AND WEIGHTS

Model No.	FIG	HP	MOTOR SIZE	DIMENSION IN INCHES								APPROX SHIP WT.
				DISCH. SIZE	A	B	C	D	E	F		
QF125-1	A	7.5	6"	5" NPT	48.3	24	24.3	5.4	7	53.1	148	
QF125-2BA	A	10	6"	5" NPT	54.8	25.4	29.4	5.4	7	59.6	178	
QF125-2	A	15	6"	5" NPT	57.4	28	29.4	5.4	7	62.2	192	
QF125-3A	A	20	6"	4" NPT	65	30.6	34.4	5.4	7	69.8	223	
QF125-3	A	25	6"	5" NPT	67.5	33.1	34.4	5.4	7	72.3	210	
QF125-4B	A	25	6"	5" NPT	72.6	33.1	39.5	5.4	7	77.4	210	
QF125-4	A	30	6"	5" NPT	75.2	35.7	39.5	5.4	7	80	243	
QF125-5BB	A	30	6"	5" NPT	80.2	35.7	44.5	5.4	7	85	252	
QF125-5*	A	40	6"	5" NPT	85.3	40.8	44.5	5.4	7	90.1	276	
QF125-6B	A	40	6"	5" NPT	90.4	40.8	49.6	5.4	7	95.2	285	
QF125-6*	A	50	6"	5" NPT	107.4	57.8	49.6	5.4	7	112.2	285	
QF125-7A	A	50	6"	5" NPT	113	57.8	55.2	5.4	7	117.8	450	
QF125-7*	A	60	6"	5" NPT	119	63.8	55.2	5.4	7	123.8	450	
QF125-8*	A	60	6"	5" NPT	124	63.8	60.2	5.4	7	128.8	459	
QF125-9	A	75	8"	5" NPT	112.7	47.4	65.3	7.6	7.7	117.5	577	
QF125-10	A	75	8"	5" NPT	117.7	47.4	70.3	7.6	7.7	122.5	586	
QF125-11	A	100	8"	5" NPT	130.3	54.91	75.4	7.6	7.7	135.1	672	
QF125-12	A	100	8"	5" NPT	135.3	54.91	80.4	7.6	7.7	140.1	701	
QF125-13	A	100	8"	5" NPT	140.3	54.91	85.4	7.6	7.7	145.1	709	

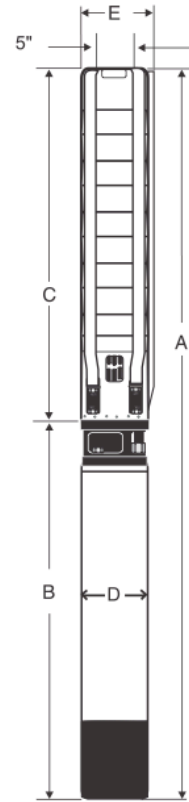



Fig. A

NOTES: All models suitable for use in 8" wells, unless otherwise noted.
Weights include pump end with motor in lbs.
*Alternate motor sizes available.

MATERIALS OF CONSTRUCTION

MATERIALS OF CONSTRUCTION	
COMPONENT	CYLINDRICAL SHAFT (1-13 Stgs.)
Valve Housing	304 Stainless Steel
Check Valve	304 Stainless Steel
Diffuser Chamber	304 Stainless Steel
Split Cone	304 Stainless Steel
Impeller	304 Stainless Steel
Suction Inerconnector	304 Stainless Steel
Inlet Screen	304 Stainless Steel
Straps	304 Stainless Steel
Cable Guard	304 Stainless Steel
Coupling	304 Stainless Steel
Pump Shaft	Duplex Stainless Steel
Intermediate Bearings	NBR
Impeller Seal Ring	NBR /PPS
Lower Bearing	NBR/304Stainless Steel 304
Uphrust Washer	Carbon/Graphite HY 22
Uphrust stop Ring	304 S.S./Tungsten Carbide
O-Ring	NBR
Valve Seat	304 Stainless Steel
Lower Valve Seat Retainer	304 Stainless Steel
Upper Valve Seat Retainer	304 Stainless Steel
Valve Guide	304 Stainless Steel
Valve Cup Spring	304 Stainless Steel

NOTES : Specifications are subject to change without notice.

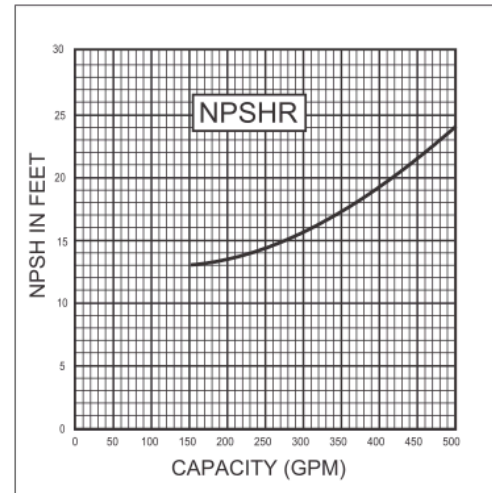

385 GPM


25 LPS

Modelo: QF 125

RANGO DE FLUJO: 75-550GPM

DESCARGA: 6"

DIÁMETRO NOMINAL: 6"

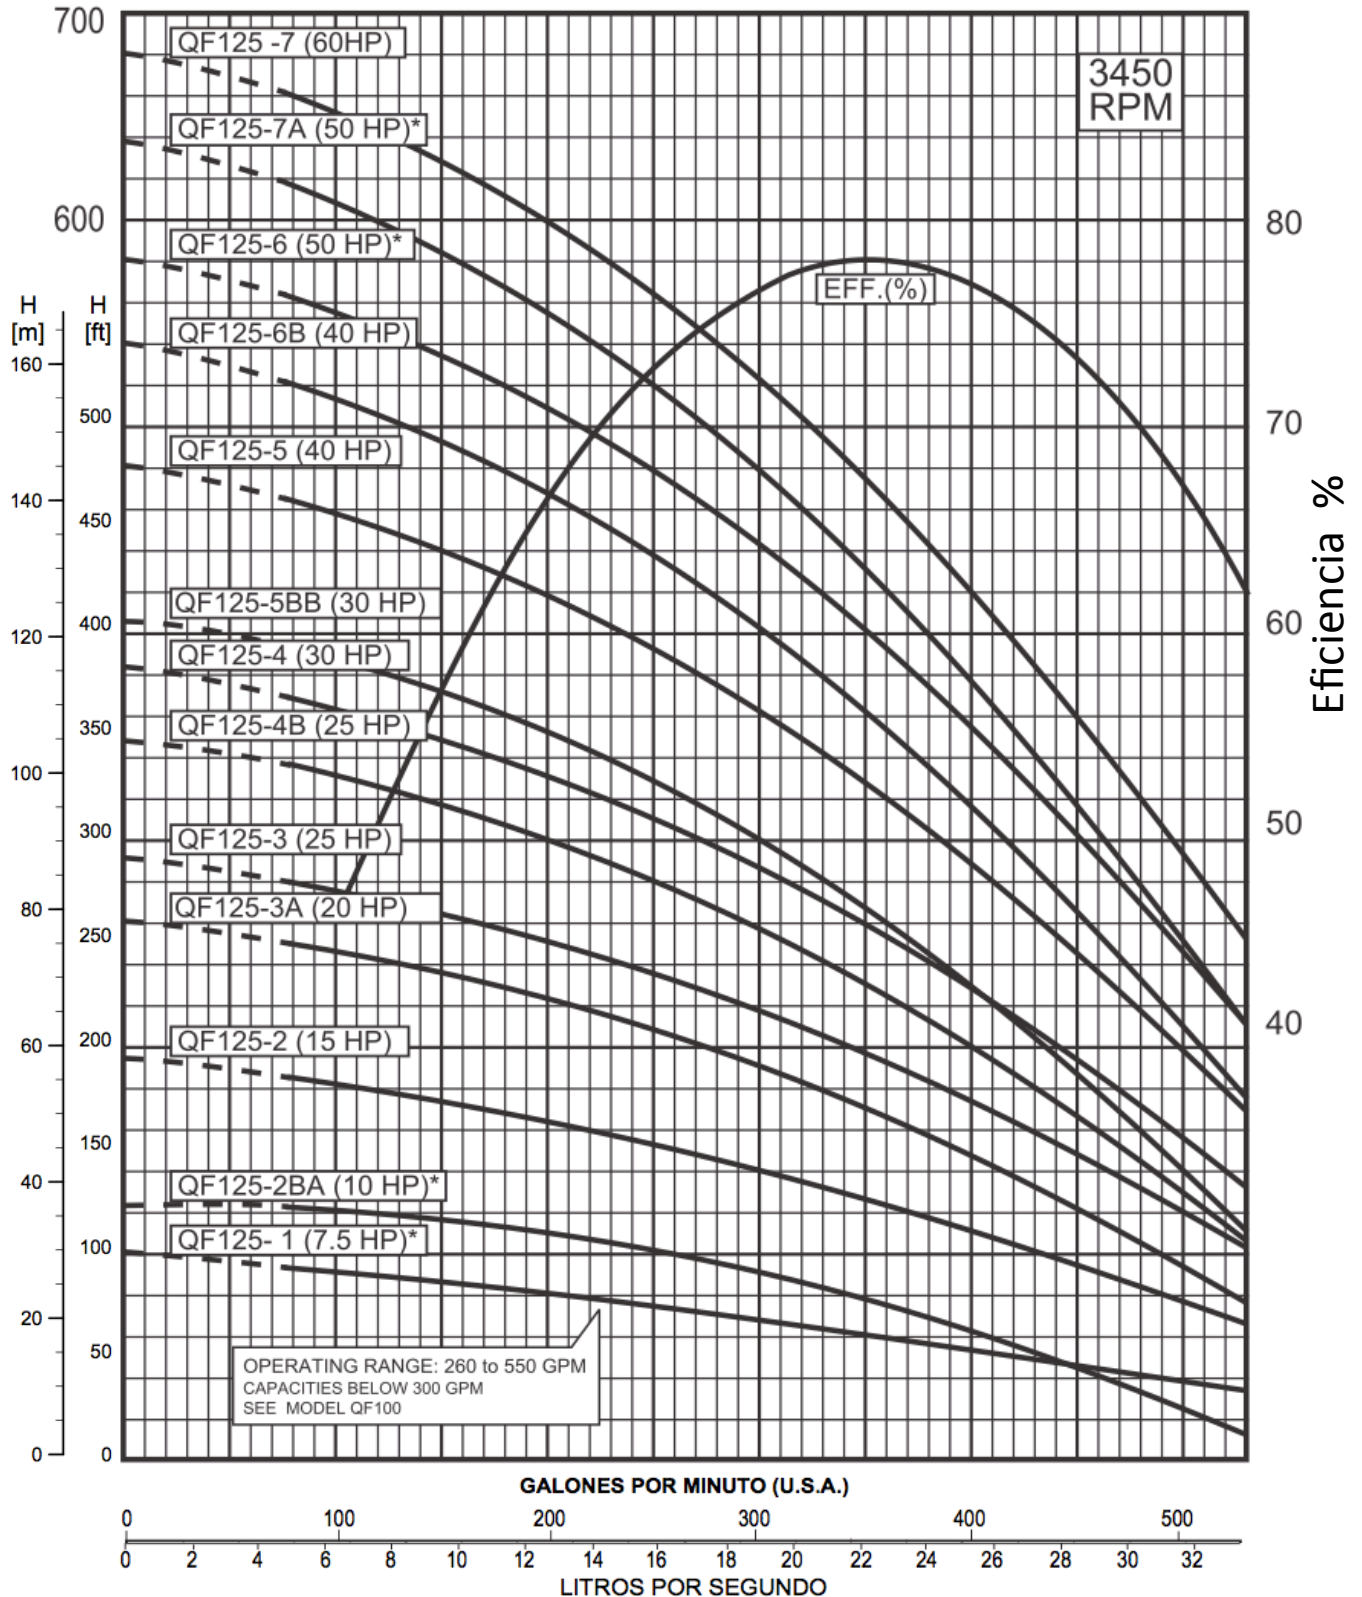

385 GPM

25 LPS

Modelo: QF 125

RANGO DE FLUJO: 75-550GPM

DESCARGA: 6"

DIÁMETRO NOMINAL: 6"

