


**PERFORMANCE CURVE**

**60 GPM**

**MODEL QF 20**

FLOW RANGE: 40 -75 GPM      OUTLET SIZE: 2 " NPT      NOMINAL DIA. 4"

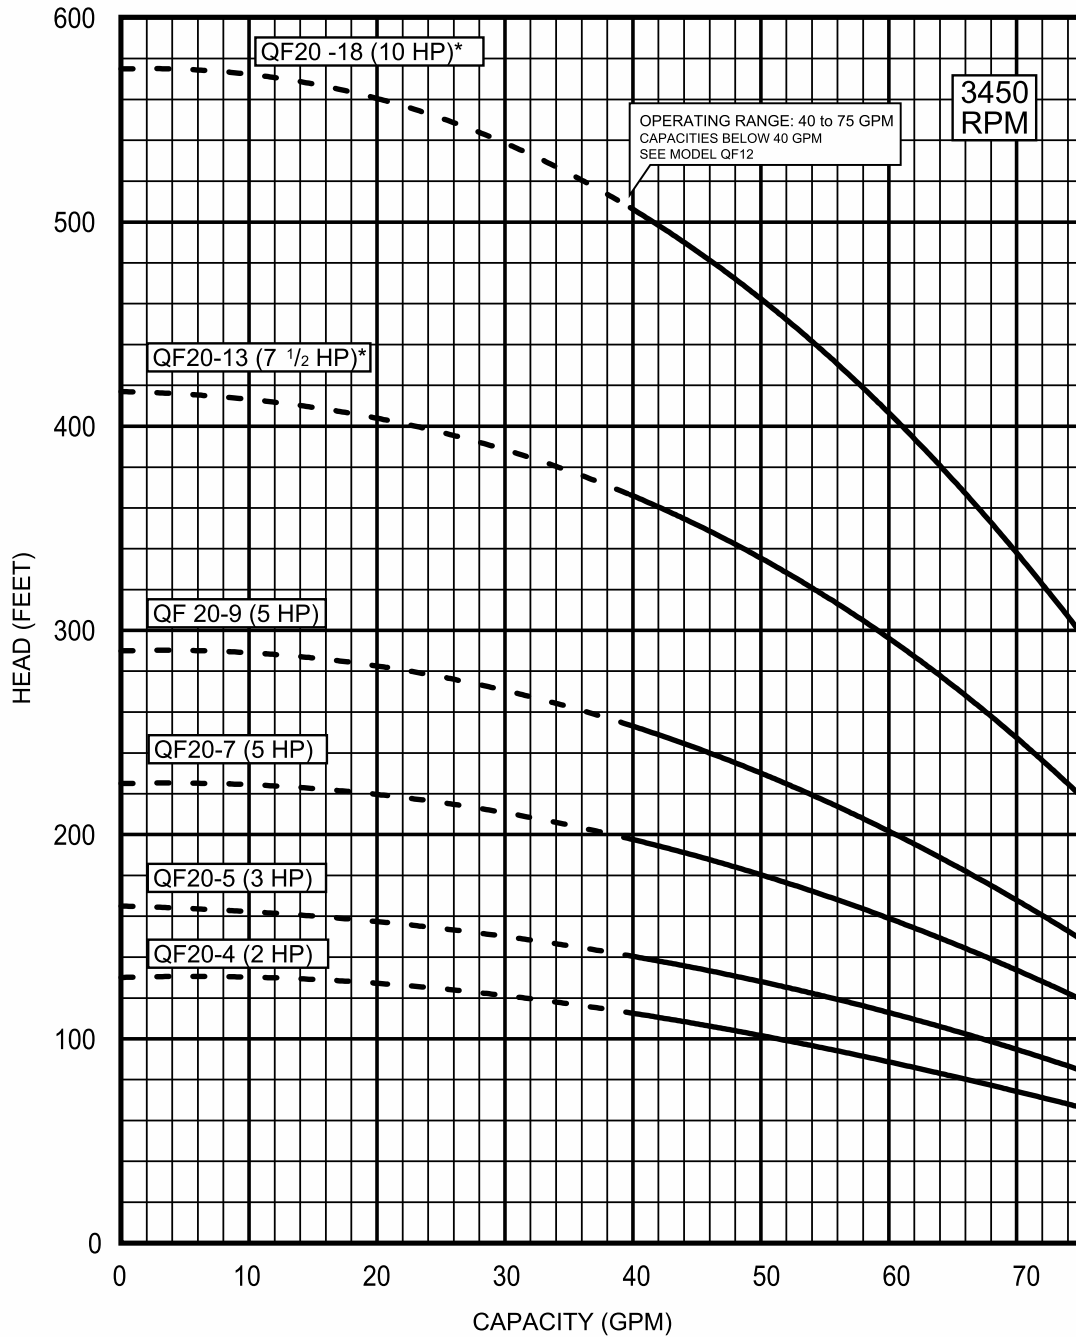

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.  
\* Also available with 6" motor.

Performance conforms to ISO 9906 Annex A  
@ 5 ft. min. submergence.

# TECHNICAL DATA

# 60 GPM

# MODEL QF 20

## DIMENSIONS AND WEIGHTS

MODEL NO.	FIG.	HP	MOTOR SIZE	Ph	DISCH. SIZE	DIMENSIONS IN INCHES					APPROX	
						A	B	C	D	E	PUMP	MOTOR
QF20-4	A	2	4"	1	2" NPT	35.6	15.9	19.7	3.8	3.9	16	37
				3		35.6	15.9					37
QF20-5	A	3	4"	1	2" NPT	43.4	21.2	22.2	3.8	3.9	18	53
				3		43.4	21.2					53
QF20-7	A	5	4"	1	2" NPT	54.5	27.2	27.4	3.8	3.9	21	68
				3		50.1	22.8					57
QF20-9	A	5	4"	1	2" NPT	59.7	27.2	32.5	3.8	3.9	24	68
				3		55.3	22.8					57
QF20-13*	A	7.5	4"	3	2" NPT	72.9	30.2	42.7	3.8	3.9	30	77
QF20-18*	A	10	4"	3	2" NPT	88.0	32.5	55.5	3.8	3.9	39	84

NOTES: All models suitable for use in 4" wells, unless otherwise noted.  
 \* Also available with 6" motor.

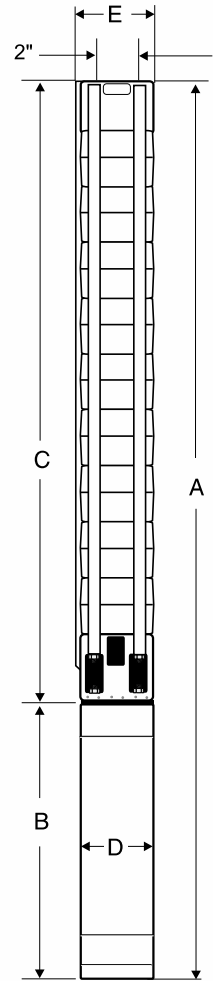


Fig. A